



APPLICATION


Suitable for water, oil and others non-abrasive media
(Refer to corrosion resistance table for valve materials selection).

SPECIFICATION

End Connection	Flanged End to DIN 2526 PN16
Pressure Rating	PN16
Working Temperature	Up to 90°C
Test Pressure (Hydrostatic)	Body - 24 Bar Seat - 17.6 Bar
Conforms:	EN 13445 (DIN 2526) EN 12334:2001

MATERIALS

PARTS	FIG. 4XD
1. Body	Cast Iron EN-GJL-250
2. Guide	Cast Iron EN-GJL-250
3. Bushing	Brass
4. Spring	Stainless Steel
5. Stem	Stainless Steel
6. Disc	Cast Iron EN-GJL-250
7. Seat	NBR

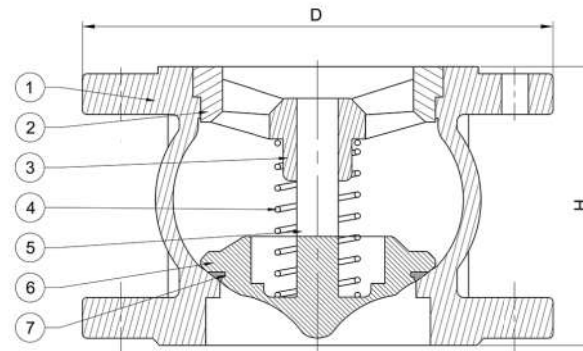

CHECK VALVE AXIAL DISC CAST IRON (SILENT CHECK)



FIG 4XD

DIMENSIONS (mm)

Size (mm)	50	65	80	100	125	150	200	250
H	100	120	140	170	200	230	300	370
D	165	185	200	220	250	285	340	405

*The specifications are subject to change without further notice